




The Model 480i CT offers cordless mobility for enterprise workers. The cordless handset provides VoIP access anywhere within an office or warehouse with exceptional features and performance.



Model 480i CT IP Phone

Key Features:

- ✦ **Cordless Mobility** — Built-in WDCT technology provides up to 300,000 sq. ft. of coverage without the need for a separate wireless network
- ✦ **Large Base Unit Display** — Eight-line backlit screen with six context sensitive softkeys provides more information and flexibility in call handling
- ✦ **Enhanced Call Management** — Large storage for personal directory, callers log, and redial list
- ✦ **Tight Integration** — Support for multiple IP telephony systems including BroadWorks®, Nortel, Sylanro, and Asterisk SIP
- ✦ **Multiple Line/Call Appearance Lights** — Supports up to 9 simultaneous calls. Juggle multiple calls easily with a single press of a button
- ✦ **Shared Call Appearances** — Shared calls allow you to place a call on hold at one set and pick it up easily at another set
- ✦ **Remarkable Audio** — Quality speakerphone with excellent voice clarity and delivery
- ✦ **Protect Your Investments** — Firmware upgrades can be downloaded and installed in the field as standards develop and protocols evolve
- ✦ **Less Wiring** — Built in dual 10/100 switched Ethernet ports let you share a connection with your computer. Inline power support eliminates power adapters

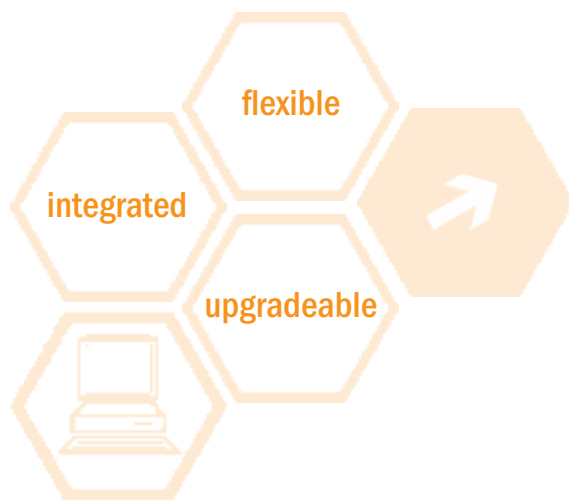

Building success with the business telephone leader

VIEW AASTRA TELECOM'S PHONES ON THE INTERNET AT WWW.AASTRA.COM

Technical specifications

480i CT Base

Physical

- » 2 position desk stand
- » 24.9 cm W x 14.7 cm D x 11.5cm H (9.8"W x 5.8"D x 4.5"H)
- » 850 g (30.0 oz.)

Power

- » Compatible with IEEE 802.3af inline power device
- » Optional Power Over Ethernet (POE) injector available, but not provided, for networks that do not supply power

Headset / Headset

- » Modular headset connector, compatible with amplified business headsets
- » Hearing aid compatible handset
- » Quality speakerphone

Display

- » 3.5" x 2.25", 8 line, backlit display

Feature Keys

- » 4 call appearance lines
- » 4 navigational keys
- » 6 customizable softkeys; programmable up to 18 functions.
- » 8 predefined hard keys for most common call handling functions including Call Transfer, Conference, Intercom, Hold, Redial, Mute

480i CT Cordless Handset

Physical

- » 13.7 cm L x 4.6 cm W x 1.9cm H (5.4"L x 1.8"W x 0.8"H)
- » 133 g (4.7 oz.)

Power

- » AC wall adapter for charging stand
- » Nickel Metal Hydride battery – 4 day standby time, 4 hour talktime

Headset / Headset

- » One handset included; expandable up to 4 handsets
- » 2.4 GHz Frequency Hopped Spread Spectrum (FHSS)
- » Warehouse coverage up to 300,000¹ sq. feet
- » Vibration alerter
- » Headset compatible

Display

- » Large 5 lines backlit display

Feature Keys

- » 2 softkeys for tight integration to the 480i CT base features
- » 4 predefined hard keys – Mute, Redial, Function, Menu.
- » Programmable function key supports up to 14 functions

Networking

- » Dual 10/100 Mbps switched Ethernet ports
- » Manual or Dynamic Host Configuration Protocol (DHCP) IP address setup
- » Time and date synchronization using SNTP
- » Built-in HTTP server for web administration and maintenance
- » Server provisioned user configuration files

Protocols / Codecs

- » IETF SIP (RFC3261)
- » G.711 μ -law / A-law
- » G.729

Feature Highlights²

- » Up to 9 call appearance lines
- » Personal directory
- » Call forward
- » Call transfer
- » Call waiting
- » Caller and calling line information
- » Callers log
- » Conference
- » Hold
- » Redial list
- » Live dial pad or pre-dial support
- » Broadsoft's BroadWorks enhanced SIP – supports Shared Call Appearances, CommPilot Call Manager
- » Nortel's MCS 5100/5200 support – Conferencing, Voicemail, and NAT Traversal support
- » Sylantro SIP – Supports Comcierge, Call Park/Pickup, Conference

Package Contents

- » 480i CT base
- » Desk Stand
- » Quick Installation Guide
- » Network Cable
- » AC adapter for base
- » 480i CT cordless handset
- » Charging stand
- » Belt clip
- » AC adapter for charging stand

¹ Depending on physical environment

² Features availability dependent on IP telephony system

THIRD-PARTY INTEROPERABILITY	480i CT	480i	9133i	9112i
BROADSOFT® - BROADWORKS® SIP (RELEASE 11.1)	☒	☒	☒	☒
NORTEL NETWORKS - MCS 5100 & 5200* (RELEASE 3.0)	☒ ¹	☒	☒	☒
SYLANTRO® - SIP (VERSION 3.1)	☒ ¹	☒	☒ ¹	☒ ¹
ASTERISK™	☒ ²	☒ ²	☒ ²	☒ ²
SPHERE COMMUNICATIONS - SPHERICALL™ MGCP		☒		

¹ Currently undergoing certification – Q3 2005

² Field tested and deployed

* The Aastra 480i, 9133i and 9112i IP Phones were verified as compatible with Nortel Networks Multimedia Communications Server 5100 and 5200 in a controlled laboratory environment.



Driving the Future of IP Communications

10/06

For more information, contact your Aastra Telecom representative, or call +1 905 760-4200.

COPYRIGHT (C) 2005 AASTRA TELECOM. ALL RIGHTS RESERVED. INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. AASTRA TELECOM ASSUMES NO RESPONSIBILITY FOR ANY ERRORS THAT MAY APPEAR IN THIS DOCUMENT. PRODUCT CAPABILITIES DESCRIBED IN THIS DOCUMENT PERTAIN SOLELY TO AASTRA TELECOM'S MARKETING ACTIVITIES IN THE U.S AND CANADA. AVAILABILITY IN OTHER MARKETS MAY VARY.