

VXI LIMITED WARRANTY

1. If your VXI amplifier fails to work for any reason during the first two years from the date of purchase as shown by the purchaser's warranty registration, VXI will repair or replace the amplifier at its election, free of charge. To register your VXI product, you may do so online at www.vxicorp.com or by calling customer service at 800-742-8588. Without warranty registration, the warranty period begins on the date of manufacture. All products returned to VXI after the two-year warranty period will be repaired as "out of warranty" products, and purchaser will be billed for such repairs pursuant to the Out-of-Warranty Repair provisions set forth below.

2. The obligations of VXI under this warranty shall be limited to repair or replacement (at our option) of any part returned, freight pre-paid, to VXI. Returned products require a Return Authorization that may be requested from VXI at 800.742.8588 or www.vxicorp.com.

3. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not permit the exclusion of implied warranties and the foregoing exclusions may not apply to you.

4. In no event shall VXI be responsible for any other damages whatsoever including direct, indirect, special, incidental, consequential or otherwise for breach of this or any other warranty, express or implied.

OUT-OF-WARRANTY REPAIRS

VXI will repair out-of-warranty product for a charge that is applicable as of the date of receipt by VXI. Call 1-800-742-8588 for current repair charges and see return details above. Out-of-warranty repairs are warranted to be free from defects in material and workmanship for ninety (90) days.




VXI CORPORATION
One Front Street, Rollinsford, NH 03869
603-742-2888 Toll free 1-800-742-8588
website: www.vxicorp.com

VXI Console Amplifier

USER GUIDE



FEATURES AND COMPONENTS

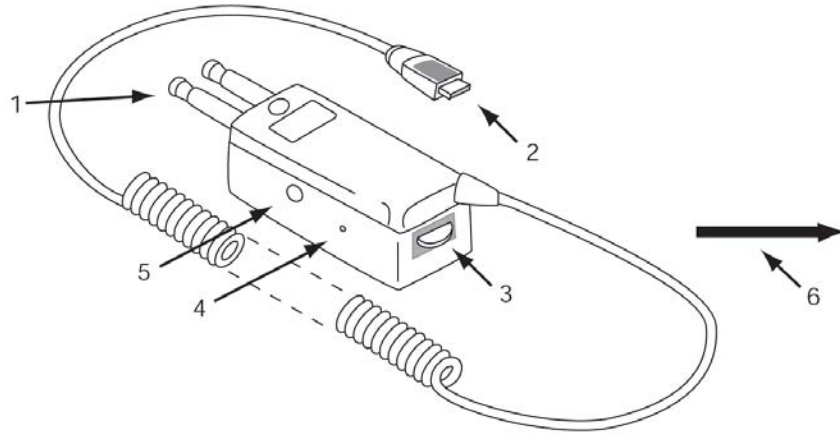

1. PJ - 327 Plug
2. Headset Connector Cord
3. Receive Volume Control
4. Microphone Volume Adjustment
5. Jack for Optional Training Headset
6. Microphone Volume Adjustment Tool

INSTALLING THE VXI CONSOLE AMPLIFIER

1. Insert PJ-327 plug (#1) into your console.
2. Attach headset cord (#2) to your headset.
3. Plug training headset into jack #5 (optional).
4. Put your headset on and adjust for comfort.
5. Make a call.
6. Adjust receive volume (#3) to a comfortable level.
7. If necessary, adjust the microphone volume. Gently insert the tool (#6) provided into the microphone volume adjustment hole (#4) and turn clockwise if your customer cannot hear you; turn counterclockwise to reduce excess noise in your ear when you speak.

**Wipe plugs as necessary if connection sounds unclear or if you hear static.*